


BALLAST ANGLE 10° - Art. 23010.L


MATERIAL	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
APPLICATION	Any type of flat roof with a maximum slope of 5 °; on the ground, on beaten ground with inert material or pavements		
INCLINATION ANGLE	10°	QUANTITY PER PALLET	10 pieces
BALLAST WEIGHT	70 kg	PALLET DIMENSIONS	140 cm x 65 cm, h = 70 cm
DISTANCE OF MODULES	Minimum distance 90 cm	PALLET WEIGHT	700 kg
MODULE POSITIONING	Vertical	DIMENSION OF PV PANEL DRAWING	200 cm x 100 cm

SYSTEM DETAILS UNIT OF MEASUREMENT - CM VERTICAL PANEL LAYING

Side View

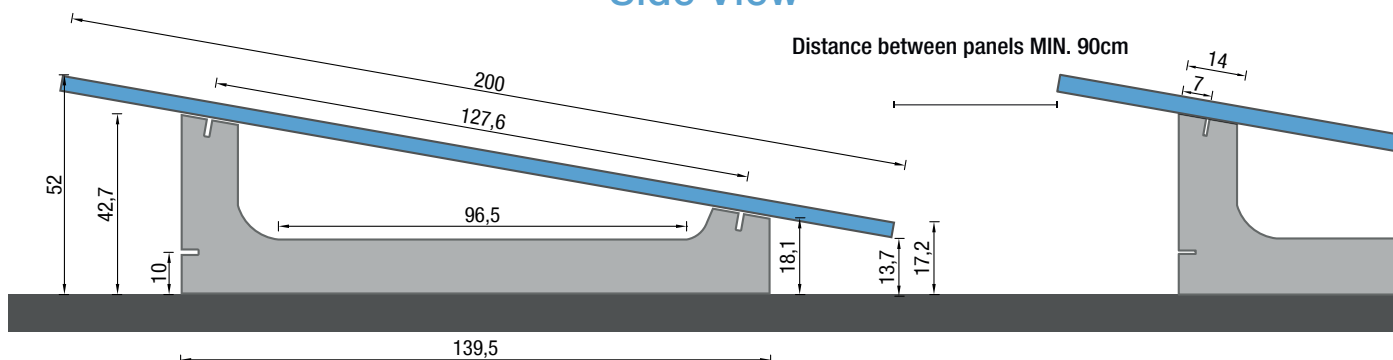

Top View

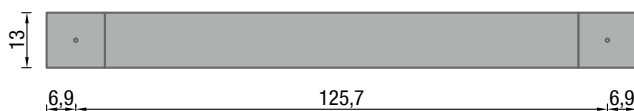

USEFUL INFORMATION

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It is recommended to also consult the information indicated in the assembly instructions of the panel manufacturer
- Compatible ballast for the vertical pose of panels with a long side of 200cm c.a.